

STEINER
 PROFESSIONAL SERIES

LT460APRO

4 Post 6 Tonne Hydraulic Alignment Hoist



HYDRAULIC HOIST FOR HEAVY-DUTY SERVICE AND ALIGNMENT WORK.



Ideal for:

Dealerships and busy workshops that need a heavy duty, quiet hoist for servicing and alignments. The LT460APRO delivers reliability backed by smart design and build quality.



Our promise: If you are not 100% satisfied with your equipment, Hoist & Garage will repair, replace or refund the equipment free of charge within the first 100 days.

Features:

- › High-strength, galvanised, and pre-stretched metal cables ensure durability and reliability
- › Electric hydraulic rolling jacks that can be operated from the jack or from the main hoist controls
- › Large-diameter pulleys with self-lubricating and maintenance-free bushes
- › Precise Wheel Alignment: Adjustable parking ratchet rails ensure precise 4-wheel alignment
- › Automatic spring-loaded safety hook system ensures complete stability, even in the event of cable breakage

LT460APRO


4 Post 6 Tonne Hydraulic Alignment Hoist

STEINER
 PROFESSIONAL SERIES


Features:

- › High-strength, galvanised, and pre-stretched metal cables ensure durability and reliability
- › Electric hydraulic rolling jacks that can be operated from the jack or from the main hoist controls
- › Large-diameter pulleys with self-lubricating and maintenance-free bushes
- › Precise Wheel Alignment: Adjustable parking ratchet rails ensure precise 4-wheel alignment
- › Automatic spring-loaded safety hook system ensures complete stability, even in the event of cable breakage

A = Platform width	620	F = Main deck height max.	1750
B = Distance between cols.	964	G = Main deck height min.	235
C = Jack width max.	1215	H = Jack height max.	596
D = Jack width min.	875	I = Jack height min.	251
E = Max. total height	2215		

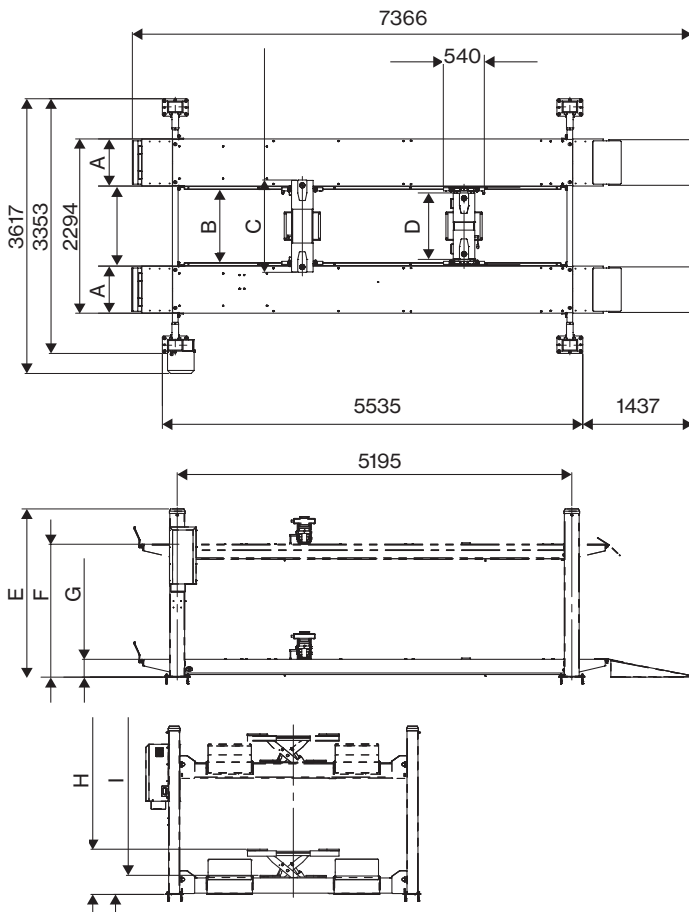

SPECIFICATIONS

Overall Dimensions

Out-Width-In-Width x Length: 3,616 x 2,254 x 7,384 (mm)

Height (max.): 2,215 (mm)

Out-Width x In-Width x Length: Main Plate: 2,254 x 1,054 x 6,076 (mm)


	Main	Jack
Lifting Capacity:	6,000 kg	3,000 kg
Max. height:	1,750 mm	595 mm
Min. height:	235 mm	251 mm
Stroke:	1,515 mm	344 mm
Ascending Time:	Approx. 40 - 60 sec	5 - 15 sec
Descending Time:	Approx. 45 - 60 sec	5 - 15 sec
Net Weight	~1,920 kg	140 kg (each)
Total weight	Approx. 2,200 kg	
Elec & Motor	3PH : 3HP x 4P x 220V / 380V x 50/60Hz	
Control	Control Panel (push button)	

LT460APRO

4 Post 6 Tonne Hydraulic Alignment Hoist


**HYDRAULIC HOIST FOR
HEAVY-DUTY SERVICE
AND ALIGNMENT
WORK.**

Design & safety



› **Electric hydraulic rolling jacks**

Quiet, smooth and fast. These jacks can be operated from the jack or from the main hoist control.




› **Alignment platforms**

Adjustable parking ratchet rails ensure precise 4-wheel alignment.



› **Safety**

High-strength, galvanised, and pre-stretched metal cables ensure durability and reliability.



› **Safety**

Automatic spring-loaded safety hook system ensures complete stability, even in the event of cable breakage.

OUR PROMISE TO YOU

**We are committed to
customer satisfaction.
All our projects
are covered by our
100 Promise.**



If you are not 100% satisfied with your equipment, Hoist & Garage will repair, replace or refund the equipment free of charge within the first 100 days.



COMPLETE SOLUTIONS FOR AUTO WORKSHOPS



Our promise: If you are not 100% satisfied with your equipment, Hoist & Garage will repair, replace or refund the equipment free of charge within the first 100 days.

0800 436 436
hoistandgarage.co.nz